



ELECTRIC PRODUCT SELECTION



+86-15501571292
info@ahpbaba.com - www.ahpbaba.com
B2-1910,Zhengkai Wanda Plaza, Wuhan, China



PRODUCT CONTENTS

Toggle Switch	01
Decora Rocker Switch	2-3
Standard Duplex Receptacle	04
Decora Duplex Receptacle	05
Tamper-resistant Receptacle	05
Single Receptacle	06
8-Outlet & 4 USB Outlet Power strip	07
Wall Mount Adapter charge	08
Smart Lock GFCI	09-10
SELF-TEST GFCI	11
Normal USB receptacle 4.2A 4.8A 5.8A	12
Normal USB receptacle 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A	13-16
Quick Charge USB receptacle 3.6A 4.2A 4.8A 5.8A	17-19
PD USB receptacle 4.8A	20
Straight Blade Power Receptacle	21
Receptacle & Plug	21
Dimmer	22
Nonmetallic Box	23-24
Wallplate	25-29
Wallplate with led night light	30



Toggle Switch

15Amp, 120Volt, Toggle framed AC quiet Switch,
Residential Grade, Grounding, Quick-wire Push-in & Side Wired, color is optional.

Product Features

- ☐ Ground: U-Grounding Screws
- ☐ Feature: Framed
- ☐ Amperage: 15Amp
- ☐ Voltage: 120VAC
- ☐ HP Rating: 1/2HP - 120V AC
- ☐ Max. Amp: 12Amp
- ☐ Termination: Quick-wire Push-In & Side wired
- ☐ Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap Material: Steel
- ☐ Std. Color: White, Ivory, Almond, Black, Brown, Black
- ☐ Standards & Cert.: UL/CUL



LD-2101

Single Pole



LD-2102

Three Way



LD-2103

20A, 120/277VAC
Commercial grade,
Single pole toggle switch

Decora Rocker Switch

15Amp, 120/277Volt, Decorative rocker AC quiet Switch,
Residential Grade, Grounding, Quick-wire Push-in & Side Wired, color is optional.



LD-2001 — Single Pole
LD-2002 — Three Way



LD-2202 — Single Pole



LD-2203 — Single Pole

Decora Rocker Switch

- ☐ Ground: U-Grounding screw
- ☐ Amperage: 15Amp
- ☐ Voltage: 120/277VAC
- ☐ HP Rating: 1/2HP-120V, 2HP-240V-277V
- ☐ Max. Amp: 12Amp
- ☐ Termination: Quick-wire Push-In & Side wired
- ☐ Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap Material: Steel
- ☐ Color: White, Ivory, Almond, Black, Brown, Black
- ☐ Standards & Cert.: UL/CUL

Decora Com Rocker Switch

- ☐ Rocker No.: 2
- ☐ Ground: Grounding
- ☐ Amperage: 15Amp
- ☐ Voltage: 120/277VAC
- ☐ HP Rating: 1/2HP-120V, 2HP-240V-277V
- ☐ Max. Amp: 12Amp
- ☐ Termination: Quick-wire Push-In
- ☐ Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap Material: Steel
- ☐ Color: White, Ivory, Almond, Black, Brown, Black
- ☐ Standards & Cert.: UL/CUL

Decora Com Rocker Switch

- ☐ Rocker No.: 3
- ☐ Ground: Grounding
- ☐ Amperage: 15Amp
- ☐ Voltage: 120/277VAC
- ☐ HP Rating: 1/2HP-120V, 2HP-240V-277V
- ☐ Max. Amp: 12Amp
- ☐ Termination: Quick-wire Push-In
- ☐ Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap Material: Steel
- ☐ Color: White, Ivory, Almond, Black, Brown, Black
- ☐ Standards & Cert.: UL/CUL

Decora Rocker Switch



LD-2211

Single pole Double Switch
15A, 120/277V
Back & side wire



LD-2213

Single pole Switch & Pilot Light
15A, 125V
Back & side WIRE

Product Features

- ☐ UL Listed
- ☐ Various kind of colors available
- ☐ Washertype break-off plaster ear for best flush alignment;
- ☐ Captive mounting screws
- ☐ Back and side wiring for easy installation;
- ☐ Easy-access green hex head ground screw;



Standard Duplex Receptacle

15Amp, 125Volt, 2P, 3W, With Ears Duplex receptacle, Straight Blade, Residential, Grounding, All screws backed Out contractor Pack, quick-wire Push-In & Side Wired, Steel Strap, color is optional

Product Features

- ☐ Ground: U-Grounding Screw
- ☐ Feature: All Screws Backed Out Contractor Pack
- ☐ Amperage: 15Amp
- ☐ Voltage: 120V AC
- ☐ NEMA: 5-15R or 5-15P or 5-15R&5-15P Combination
- ☐ Pole: 2
- ☐ Wire: 3
- ☐ Termination: Quick-wire Push-In & Side
- ☐ Face Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap material: Steel
- ☐ Standard Color: White, Ivory, Black, Almond, Grey, Brown
- ☐ Standard & Certification: UUCUL



LD-3010



LD-3016

20Amp, 125Volt, 2P, 3W, With Ears Duplex receptacle, Straight Blade, Residential, Grounding, All screws backed Out contractor Pack, quick-wire Push-In & Side Wired, Steel Strap, color is optional

Product Features

- ☐ Ground: U Grounding Screw
- ☐ Feature: All Screws Backed Out Contractor Pack
- ☐ Amperage: 20Amp
- ☐ Voltage: 120V AC
- ☐ NEMA 5-20R& 5-20P Combination
- ☐ Pole: 2
- ☐ Wire: 3
- ☐ Termination: Quick-wire Push-In & Side
- ☐ Face Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap material: Steel Standard Color
- ☐ White, Ivory, Black, Almond, Grey, Brown
- ☐ Standard & Certification: UUCUL



LD-3011



LD-3014

Decora Duplex Receptacle

15Amp & 20Amp, 125Volt, 2P, 3W, Decora plus Duplex receptacle, Straight Blade, Self-Grounding, All screws backed Out contractor Pack, quick-wire Push- In & Side Wired, Steel Strap, color is optional.

Product Features

- ☐ Ground: Self-Grounding
- ☐ Feature: All Screws Backed Out Contractor Pack
- ☐ Amperage: 20A & 20A
- ☐ Voltage: 120V AC
- ☐ NEMA: 5-15R and 5-20R
- ☐ Pole: 2
- ☐ Wire: 3
- ☐ Termination: Quick-wire Push-In & Side
- ☐ Face Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap material: Steel
- ☐ Standard Color: White, Ivory, Black, Almond, Grey, Brown
- ☐ Standard & Certification: UL/CUL



LD-3012



LD-3013

Tamper-resistant Receptacle



LD-3010(TR)

LD-3011(TR)

LD-3012(TR)

LD-3013(TR)



Single Receptacle

15Amp & 20Amp, 125Volt, 2P, 3W, Narrow Body receptacle, Straight Blade, Grounding, All screws backed Out contractor Pack, Side Wired, Steel Strap, color is optional.

Product Features

- ☐ Ground: Self-Grounding
- ☐ Amperage: 20Amp
- ☐ Voltage: 120V AC
- ☐ NEMA: 5-15R, 5-20R, 5-15P, 5-20P
- ☐ Pole: 2
- ☐ Wire: 3
- ☐ Termination: Quick-wire Push-In & Side
- ☐ Face Material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap material: Steel
- ☐ Standard Color: White, Ivory, Black, Almond, Grey, Brown



8-Outlet & 4 USB Outlet Power strip

Product Features

- ❑ Input Voltage: 125VAC 60HZ
- ❑ AC Outlet Voltage: 125VAC 60HZ
- ❑ USB Outlet Voltage: DC5V
- ❑ AC Outlet Power: 1875W
- ❑ USB Outlet Power: DC5V/4.2A (Totally)
- ❑ Material: PC
- ❑ Feature: 8 US standard AC outlets & 4 USB outlet (Dual Type USB-A&C Ports), with 2M heavy duty cord delivers optimal and safe AC power
- ❑ Color: White, Ivory, Black, Almond, Grey, Brown
- ❑ Standard & certifications: UL/cUL



LD-URP001



Wall Mount Adapter charge

Product Features

- ❑ Input Voltage: 125VAC 60HZ
- ❑ AC Outlet Voltage: 125VAC 60HZ
- ❑ USB Outlet Voltage: DC5V
- ❑ AC Outlet Power: 1875W
- ❑ USB Outlet Power: DC5V/4.2A (Totally)
- ❑ Material: PC
- ❑ Feature: 3 US standard AC outlets & 4 USB outlet (Dual Type USB-A&C Ports), Unique, Efficient Design with Dual Slide Out Holders
- ❑ Color: White, Ivory, Black, Almond, Grey, Brown
- ❑ Standard & certifications: UL/cUL



LD-URZ01



Smart Lock GFCI

15Amp, 120Volt, NEMA5-15R, 2P, 3W, Decora plus duplex receptacle, straight blade, GFCI ground fault, Smart Lock, Button match face color, Back and Side 20A, Feed- thru wired, Steel strap, color is optional.

Product Features

- ☐ Ground: Grounding
- ☐ Feature: Smart Lock, button match face color or standard.
- ☐ Amperage: 15Amp and 20Amp
- ☐ Voltage: 120V AC
- ☐ NEMA: 5-15R and 5-20R
- ☐ Pole: 2
- ☐ Wire: 3
- ☐ Termination: Back and Side 20Amp feed-thru
- ☐ Face material: Thermoplastic
- ☐ Body Material: Thermoplastic
- ☐ Strap material: Steel
- ☐ Standards & certifications: ETL/cETL

Without TR GFCI



LD-3001

15A, Without LED light indicator



LD-3002

20A, Without LED light indicator



LD-3003

15A, With LED light indicator



LD-3004

20A, With LED light indicator

Dielectric---Withstands 1500V per UL 498

Current Limit: 10kA

Temperature Rise: Max 50°C after 50 cyc OL 150 pct rate current



TR GFCI



LD-3008A

15A, With LED light indicator



LD-3008B

20A, With LED light indicator

TR&WR GFCI



LD-3008C

15A, With LED light indicator



LD-3008D

20A, With LED light indicator

SELF-TEST GFCI

Product Features

- Grounding: Grounding
- Feature: Smart Lock, button match face
- color standard
- Amp: 15&20A
- Volt: 120V AC
- NEMA: 5-15R and 5-20R
- Pole:2
- Wire:3
- Termination: Back and side 20Amp feed thru
- Face material: Thermoplastic
- Body material: Thermoplastic
- Strap material: Steel
- Auto test function: The GFCI automatically do a self-internal test every 2 hour to ensure that it can respond to a ground fault



LD-3003-S



LD-3004-S



LD-3008A-S

LD-3008B-S

LD-3008C-S

LD-3008D-S

Normal USB receptacle 4.2A 4.8A 5.8A

Product Features

- Input Voltage: 125VAC 60HZ
- AC Outlet Voltage: 125VAC 60HZ
- USB Outlet Voltage: DC5V
- USB Outlet Power: DC5V/4.2A (Totally) or DC5V/4.8A (Totally) or DC5V/5.8A (Totally)
- Material: PC
- Wire Terminals: #14-#12 AWG
- Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- Color: White, Ivory, Black, Almond, Grey, Brown
- Standard & certifications: UL/cUL



LD-U001



LD-U002

LD-UR02

Normal USB receptacle 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Product Features

- ❑ Input Voltage: 125VAC 60HZ
- ❑ AC Outlet Voltage: 125VAC 60HZ
- ❑ USB Outlet Voltage: DC5V
- ❑ USB Outlet Power: DC5V/2.1A (Totally), DC5V/2.4A (Totally), DC5V/3.1A (Totally), DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- ❑ Material: PC
- ❑ Wire Terminals: #14-#12 AWG
- ❑ Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- ❑ Color: White, Ivory, Black, Almond, Grey, Brown
- ❑ Standard & certifications: UL/cUL



LD-URL 15A A-A 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Normal USB receptacle 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Product Features

- ❑ Input Voltage: 125VAC 60HZ
- ❑ AC Outlet Voltage: 125VAC 60HZ
- ❑ USB Outlet Voltage: DC5V
- ❑ USB Outlet Power: DC5V/2.1A (Totally), DC5V/2.4A (Totally), DC5V/3.1A (Totally), DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- ❑ Material: PC
- ❑ Wire Terminals: #14-#12 AWG
- ❑ Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- ❑ Color: White, Ivory, Black, Almond, Grey, Brown
- ❑ Standard & certifications: UL/cUL



LD-URL 15A A-C 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Normal USB receptacle 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Product Features

- Input Voltage: 125VAC 60HZ
- AC Outlet Voltage: 125VAC 60HZ
- USB Outlet Voltage: DC5V
- USB Outlet Power: DC5V/2.1A (Totally), DC5V/2.4A (Totally), DC5V/3.1A (Totally), DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- Material: PC
- Wire Terminals: #14-#12 AWG
- Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- Color: White, Ivory, Black, Almond, Grey, Brown
- Standard & certifications: UL/cUL



LD-URL 20A A-A 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Normal USB receptacle 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Product Features

- Input Voltage: 125VAC 60HZ
- AC Outlet Voltage: 125VAC 60HZ
- USB Outlet Voltage: DC5V
- USB Outlet Power: DC5V/2.1A (Totally), DC5V/2.4A (Totally), DC5V/3.1A (Totally), DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- Material: PC
- Wire Terminals: #14-#12 AWG
- Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- Color: White, Ivory, Black, Almond, Grey, Brown
- Standard & certifications: UL/cUL



LD-URL 20A A-C 2.1A 2.4A 3.1A 3.6A 4.2A 4.8A 5.8A

Quick Charge USB receptacle 3.6A 4.2A 4.8A 5.8A

Product Features

- Input Voltage: 125VAC 60HZ
- AC Outlet Voltage: 125VAC 60HZ
- USB Outlet(Quick Charge): QC: 5V-12V
- USB Outlet Power: DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- Material: PC
- Wire Terminals: #14-#12 AWG
- Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- Color: White, Ivory, Black, Almond, Grey, Brown
- Standard & certifications: UL/cUL



LD-URL 15A A-AQC 3.6A 4.2A 4.8A 5.8A

Quick Charge USB receptacle 3.6A 4.2A 4.8A 5.8A

Product Features

- Input Voltage: 125VAC 60HZ
- AC Outlet Voltage: 125VAC 60HZ
- USB Outlet(Quick Charge): QC: 5V-12V
- USB Outlet Power: DC5V/3.6A (Totally), DC5V/4.2A (Totally), DC5V/4.8A (Totally), DC5V/5.8A (Totally)
- Material: PC
- Wire Terminals: #14-#12 AWG
- Feature: Smart-intelligent identification chip, automatic identify the charging current that the device required.
- Color: White, Ivory, Black, Almond, Grey, Brown
- Standard & certifications: UL/cUL



LD-URL 15A A-QQC 3.6A 4.2A 4.8A 5.8A

Quick Charge USB receptacle 3.6A 4.2A 4.8A 5.8A



LD-URL 20A A-QQC 3.6A 4.2A 4.8A 5.8A



LD-URL 20A A-QQC 3.6A 4.2A 4.8A 5.8A

PD USB receptacle 4.8A

Product Features

- ☐ Input Voltage: 125VAC 60HZ
- ☐ AC Outlet Voltage: 125VAC 60HZ
- ☐ USB Outlet: PD:5V-12V
- ☐ USB Outlet Power: DC5V/4.8A (Totally)
- ☐ Material: PC
- ☐ Wire Terminals: #14-#12 AWG
- ☐ Feature Smart-intelligent identification chip, automatic identify the charging current that the device required.
- ☐ Color: White, Ivory, Black, Almond, Grey, Brown
- ☐ Standard & certifications: UL/cUL



LD-URL 15A A-QQC 4.8A
LD-URL 20A A-QQC 4.8A

Straight Blade Power Receptacle

UL Listed, 50 Amp, 125/250 Volt, NEMA 10-30R, 3P, 3W, Flush Mtg Receptacle, Non-Grounding, Side Wired, Steel Strap, Heavy duty plastic construction



LD-3201 50A

UL Listed, 30 Amp, 125/250 Volt, NEMA 10-30R, 3P, 3W, Flush Mtg Receptacle, Non-Grounding, Side Wired, Steel Strap, Heavy duty plastic construction



LD-3205 30A

Electrical Specifications

Dielectric Voltage Withstands 2000V per UL498;
Current Limiting: Full Rated Current;
Temperature Rise: Max 30C after 50 cyc OL at 150 pct rated current

Mechanical Specifications

Terminal ID: Brass-Hot, Green-Ground,
Terminal Accom.: White-Neutral; Up to 4 AWG

Material Specifications

Face & body Material: Heavy duty plastic;
Product ID: Ratings are permanently marked on device;
Line Contacts: Brass Double-Wipe;
Yoke: Zinc-Plated Steel

Environmental Specifications

Flammability: Rated V-2 per UL94;
Operating Temp.: -40C to 60C

AC Horsepower Ratings

At Rated Voltage: 2 HP

Standards and Certifications: UL498


Receptacle & Plug



LD-2122



LD-3714

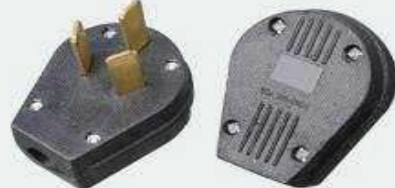

LD-3715

Dimmer

Diva Dimmer 120V 60HZ



LD-4001 Single pole, 600W

LD-4002 Single pole, 1000W

LD-4003 Three way, 600W

LD-4004 Three way, 1000W



LD-4001LA Single pole, 600W with light

LD-4002LA Single pole, 1000W with light

LD-4003LA Three way, 600W with light

LD-4004LA Three way, 1000W with light

Rotary Dimmer 120V/60HZ



LD-4040 single pole, 700W

LD-4041 single pole, 600W

LD-4042 Three Way, 700W

LD-4043 Three Way, 600W



Nonmetallic Box



LD-8011



LD-8012

Switch/Outlet Boxes

Part No.	Volume (cu. in.)	Description	Size	Knockouts	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs)
LD-8011	18	Single Gang with captive nails	2 7/8"D × 2 1/4"W × 3 3/4"L	2 (2 each end)	100	22
LD-8012	20	Single Gang with captive nails	3 1/4"D × 2 1/4"W × 3 3/4"L	2 (2 each end)	100	24

◆ Suitable for masonry walls



LD-8017



LD-8019



LD-8020

Meets NEMA OS-2

Part No.	Volume (cu. in.)	Description	Size	Knockouts	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs)
LD-8017	32	Two Gang with captive nails	1"D × 4"W × 3 3/4"L	8 (4 each end)	50	16
LD-8019	44	Three Gang with captive nails	2 11/16"D × 3 5/4"W × 5 5/8"L	12 (6 each end)	50	21
LD-8020	60	Four Gang with captive nails and bracket support	2 1/2"D × 3 7/10"W × 7 3/5"L	12 (8 each end)	25	14

Nonmetallic Box



LD-8030



LD-8332

Ceiling

Part No.	Volume (cu. in.)	Description	Size	Integral Clamps	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs)
LD-8030	18	Round Old Work Case 3 Zip-Mount™ retainers	2 3/4"D	4	100	24

Part No.	Volume (cu. in.)	Description	Size	Integral Clamps	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs)
LD-8332	24	4" Square Box	4" × 4" × 2.16"	4	50	42



Wallplate



LD-7001

1 Gang Toggle Switch Cover,
Standard Size 2.75"x4.5"

LD-7001	Plastic
---------	---------



LD-7091

1 Gang Toggle Switch Cover,
Standard Size 2.75"x4.5"

LD-7081	Brushed Stainless Steel
LD-7091	Polished Stainless Steel



LD-7002

2 Gang Toggle Switch Cover,
Standard Size 4.563"x4.5"

LD-7002	Plastic
---------	---------



LD-7092

2 Gang Toggle Switch Cover,
Standard Size 4.563"x4.5"

LD-7082	Brushed Stainless Steel
LD-7092	Polished Stainless Steel



LD-7003

3 Gang Toggle Switch Cover,
Standard Size 6.375"x4.5"

LD-7003	Plastic
---------	---------



LD-7004

4 Gang Toggle Switch Cover,
Standard Size 8.188"x4.5"

LD-7004	Plastic
---------	---------



LD-7101

1 Gang Decora Switch Cover,
Standard Size 2.75"x4.5"

LD-7101	Plastic
---------	---------



LD-7191

1 Gang Decora Switch Cover,
Standard Size 2.75"x4.5"

LD-7181	Brushed Stainless Steel
LD-7191	Polished Stainless Steel



LD-7102

2 Gang Decora Switch Cover,
Standard Size 4.563"x4.5"

LD-7102	Plastic
---------	---------



LD-7192

2 Gang Decora Switch Cover,
Standard Size 4.563"x4.5"

LD-7182	Brushed Stainless Steel
LD-7192	Polished Stainless Steel



LD-7103

3 Gang Decora Switch Cover,
Standard Size 6.375"x4.5"

LD-7103	Plastic
---------	---------



LD-7104

4 Gang Decora Switch Cover,
Standard Size 8.188"x4.5"

LD-7104	Plastic
---------	---------



LD-7105

5 Gang Decora Switch Cover,
Standard Size 10"x4.5"

LD-7105	Plastic
---------	---------



LD-7106

6 Gang Decora Switch Cover,
Standard Size 11.81"x4.5"

LD-7106	Plastic
---------	---------



LD-7201

1 Gang Duplex Receptacle Cover,
Standard Size 2.75"x4.5"

LD-7201	Plastic
---------	---------



LD-7291

1 Gang Duplex Receptacle Cover,
Standard Size 2.75"x4.5"

LD-7281	Brushed Stainless Steel
LD-7291	Polished Stainless Steel



LD-7202

2 Gang Duplex Receptacle Cover,
Standard Size 4.563"x4.5"

LD-7202	Plastic
---------	---------



LD-7292

2 Gang Duplex Receptacle Cover,
Standard Size 4.563"x4.5"

LD-7282	Brushed Stainless Steel
LD-7292	Polished Stainless Steel

Wallplate



LD-7203

3 Gang Duplex Receptacle Cover, Standard Size 6.375"x4.5"	
LD-7203	Plastic



LD-7293

3 Gang Duplex Receptacle Cover, Standard Size 6.375"x4.5"	
LD-7283	Brushed Stainless Steel
LD-7293	Polished Stainless Steel



LD-7107

2G Corn Cover(Toggle & Decora), Standard Size 4.563"x4.5"	
LD-7107	Plastic



LD-7207

2G Corn Cover(Toggle & Duplex), Standard Size 4.563"x4.5"	
LD-7207	Plastic



LD-7297

2G Corn Cover(Toggle & Duplex), Standard Size 4.563"x4.5"	
LD-7287	Brushed Stainless Steel
LD-7297	Polished Stainless Steel



LD-7208

3G Corn Cover(Toggle & Decora), Standard Size 6.375"x4.5"	
LD-7208	Plastic



LD-7307

2G Corn Cover(Decora & Duplex), Standard Size 4.563"x4.5"	
LD-7307	Plastic



LD-7397

2G Corn Cover(Decora & Duplex), Standard Size 4.563"x4.5"	
LD-7387	Brushed Stainless Steel
LD-7397	Polished Stainless Steel



LD-7491

1 Gang phone & Coaxial Cover, Standard Size 2.75"x4.5"	
LD-7481	Brushed Stainless Steel
LD-7491	Polished Stainless Steel

Wallplate



LD-7402

1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5"	
LD-7402	Plastic



LD-7492

1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5"	
LD-7482	Brushed Stainless Steel
LD-7492	Polished Stainless Steel



LD-7501

1 Gang Blank Cover, Standard Size 2.75"x4.5"	
LD-7501	Plastic



LD-7591

1 Gang Blank Cover, Standard Size 2.75"x4.5"	
LD-7581	Brushed Stainless Steel
LD-7591	Polished Stainless Steel



LD-7502

2 Gang Blank Cover, Standard Size 4.563"x4.5"	
LD-7502	Plastic



LD-7592

2 Gang Blank Cover, Standard Size 4.563"x4.5"	
LD-7582	Brushed Stainless Steel
LD-7592	Polished Stainless Steel

Wallplate



LD-7101A

1 Gang Screwless Cover,
Standard Size 2.75"x4.5"

LD-7101A	Plastic
----------	---------



LD-7601

1 Gang Broadband Cover,
Standard Size 2.75"x4.5"

LD-7601	Plastic
---------	---------



LD-7602

2 Gang Broadband Cover,
Standard Size 2.75"x4.5"

LD-7602	Plastic
---------	---------



LD-7603

3 Gang Broadband Cover,
Standard Size 2.75"x4.5"

LD-7603	Plastic
---------	---------



LD-7604

4 Gang Broadband Cover,
Standard Size 2.75"x4.5"

LD-7604	Plastic
---------	---------



Wallplate with led night light

Product Features

- ☐ Amp: 15A&20A
- ☐ Voltage: 125V
- ☐ Material: PC
- ☐ Color: white
- ☐ Batteries or Wire Required: No Batteries
- ☐ or Wires
- ☐ Feature: Receptacle wallplate with one light-operated and 3 LED nightlights, one LED nightlight is 0.01W, Pressure value is total 3V
- ☐ Color: White, Ivory, Black, Almond, Grey, Brown
- ☐ Standard & certifications: UL/cUL



LD-7101LED



LD-7201LED